


SoundFloor STI

Description

SoundFloor STI is an acoustic overlay flooring product suitable for use on new and existing timber and concrete floors. It comprises an upper face of V313 moisture-resistant chipboard with a high density mineral fibre slab on the underside.

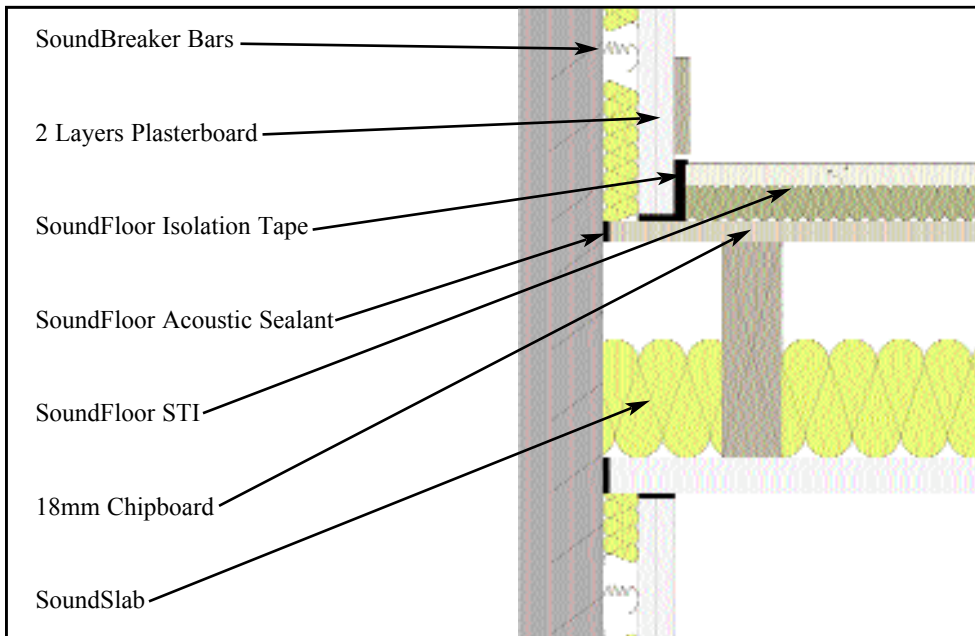

SoundFloor STI is 48mm thick and can be used to build up existing floor levels. It is designed to damp vibration and attenuate both airborne sound and impact noise passing through floors.

The moisture-resistant upper surface means **SoundFloor STI** can be used throughout the building, including kitchens and bathrooms.

Application

SoundFloor STI is used extensively to upgrade separating floors when converting existing buildings into apartments, and in all manner of new build projects particularly by those looking to meet or exceed Building Regulation requirements.

Technical Advice and Acoustic Testing

Highly qualified and experienced building and acoustic engineers are available to discuss all aspects of acoustic performance requirements and can prepare specifications and effective installation instructions to ensure optimum performance is achieved. They can also undertake pre- and post-installation testing for airborne and impact sound insulation, if required. Further details are available on request.

Operating Temperature

SoundFloor STI is suitable for use at normal building temperatures.

Fire Performance

SoundFloor STI will not add significantly to any existing fire hazard when properly installed.

Crown Business Park
Old Dalby
Melton Mowbray
Leicestershire
LE14 3NQ
Tel: 01664 821810
Fax: 01664 821820

E-mail:
info@hodgsongroup.co.uk

Web Site:
www.acoustic.co.uk

Dimensions and Weight

Reduc	Installed Thickness mm	Overall Board Dimensions Excluding Lap Joint	Laid Area per Board Allowing for Lap Joint	Weight	
				Per m ²	Per Board
STI	48	2400mm x 600mm	1.44m ²	16.7kg	24kg

Building Regulation Requirements

Building Regulations Approved Document E (England and Wales) and Building (Scotland) Regulations Section 5 call for the following standards to be achieved for all timber and concrete floors:

Building Regulations Approved Document E (England and Wales) 2003	Airborne Sound		Impact Sound
	Site Test Result D _{nT,w} + C _{tr} dB	LabTest Result R _w dB	Site Test Result L' _{nT,w} dB
Separating Floors - Conversions	43 or greater	n/a	64 or less
Separating Floors - New Build	45 or greater	n/a	62 or less
Internal Floors - Conversions and New Build	n/a	40 or greater	n/a

Building (Scotland) Regulations 2004 Section 5	Airborne Sound	Impact Sound
	D _{nT,w} dB	L' _{nT,w} dB
New Build and Conversions	52 or greater	61 or less

Acoustic Performance

Detailed below are acoustic test results for a typical timber floor construction. Performance data for other floor constructions together with more detailed technical advice is available on request.

Typical Floor Construction	Airborne Sound			Impact Sound
	Site Test Result D _{nT,w} dB	Site Test Result D _{nT,w} + C _{tr} dB	LabTest Result R _w dB	Site Test Result L' _{nT,w} dB
SoundFloor STI overlaid onto 18mm chipboard with 100mm SoundSlab fitted between 50mm x 225mm timber joists at 400mm centres and 2 layers of 12.5mm plasterboard on the underside to form the ceiling	52	45	*58	62
As above incorporating SoundBreaker Bars to de-couple the ceiling below	58	51	*64	55

* The R_w figures quoted above apply to domestic applications only. Details for commercial applications are available on request.

Flanking Transmission

The performance figures quoted above are based on test results for timber floors and can only be expected if the building design and construction has followed good practice to ensure all potential flanking paths have been eliminated. In order for wall and floor constructions to be fully effective, extreme care should be taken to correctly detail the junctions between the separating wall or floor and the associated elements such as external walls and any penetrations. If junctions are incorrectly detailed, the acoustic performance will be limited and Building Regulation requirements may not be achieved in practice.

Packaging and Handling

SoundFloor STI boards are packed on non-returnable pallets. Boards should be stored inside and under cover in a dry, well-ventilated area. They should be laid flat and kept off the ground. Extreme care should be taken when handling to avoid damage.

Application and Fixing

- See separate sheet.

Availability

SoundFloor STI, SoundSlab, SoundBreaker Bars, SoundFloor Joint Adhesive, SoundFloor Isolation tape and SoundFloor Acoustic Sealant are available through a national network of stockists, distributors and builders merchants. Further details available on request.

For Further Information

contact
Hodgson & Hodgson
Group Ltd

Crown Business Park
Old Dalby
Melton Mowbray
Leicestershire
LE14 3NQ
Tel: 01664 821810
Fax: 01664 821820

E-mail:
info@hodgsongroup.co.uk

Web Site:
www.acoustic.co.uk